

LC Switchable Uniboot Patch Cord with Push-pull Tab

DESCRIPTION


LC Uniboot with push-pull tab connector in a unique connector offering that allows for the use of a single round cable for duplex applications, a tool less polarity reversing feature, latch lock security and boot options up to 6mm. Widely used for FTTH applications requiring larger diameter cable.

FEATURES

- Boots up to 6mm for FTTH OSP cable
- Polarity Reversal visual indicator
- Uniboot aids in cable management
- Easy to disassemble
- 60% increase in density

APPLICATIONS

→ Data Center → Wireless → FTTH → Telecommunications

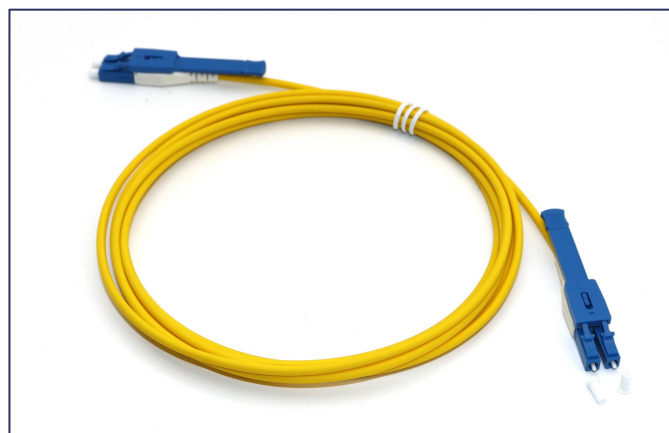

SPECIFICATIONS

Parameters	Single Mode		Multimode	
	Standard	Premium	Standard	Premium
Max Insertion Loss	0.30dB	0.25dB	0.3dB	0.25dB
Typical Return Loss	≥50dB(UPC); ≥60dB(APC)		≥25dB	
Operating Temperature	-40~+75(°C)			
Technical Specification				
Physical Characteristics	Description			
Cable Outside Diameter	2.0mm/3.0mm			
Interchangeability	≤0.2dB			
Vibration	≤0.2dB			
Mechanical Characteristics				
Fiber Type	OS2/OM3/OM4			
Cable Jacket	PVC (Riser/OFNR)/LSZH/Plenum (OFNP)			
Jacket Color	OS2: Yellow; OM3/OM4: Aqua			
Switchable	YES			
Environmental Characteristics				
Operating Temperature	OFNR/LSZH: -10 to 70°C; OFNP: 0 to 60°C			
Storage Temperature	OFNR/LSZH: -20 to 70°C; OFNP: -10 to 60°C			

ORDERING INFORMATION

Description	Reference