

Horizontal Splice Closure 16 Ports IP68

DESCRIPTION


Fiber Optic Splice Closure is one essential part for fiber optic network. In briefly, Closure is used to protect fiber splicing, store slack cables, distribute cables, etc. FOSC can be installed in aerial, pole, wall, duct mounting, and directly buried.

FEATURES

- Horizontal mechanical sealing and advanced internal structure
- Engineering PC plastic with high-strength to make batter reliability and sealing performance
- Enough space for winding and storing fibers
- Good sealing performance after re-entry and re-using
- Save installation time and improve work efficiently

APPLICATIONS

- Bunchy fibers
- Aerial, underground, wall-mounting, hand hole-mounting, pole-mounting and duct-mounting

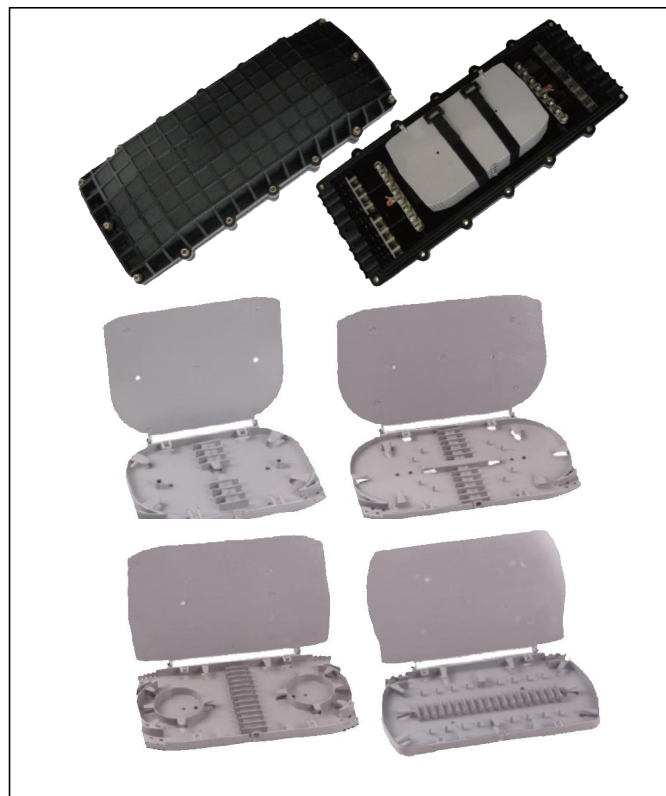

SPECIFICATIONS

Parameter	Valve			
Dimensions(HxWxD)	560*245*180mm			
Cable Entry Ports	16			
Cable Diameter In/Output	Round 23mm*2 / Round 20mm*2 / Round 16mm*4 / Round 14mm*8			
Max. Tray Capacity	8 Trays	8 Trays	5 Trays	5 Trays
Tray Dimensions	160*122*10mm	258*154*11mm	258*154*14mm	270*163*15mm
Fibers/Tray	12-24F	24-48F	144F	216F
Max. Capacity	192F	336F	720F	1080F

ORDERING INFORMATION

Description	Reference
Horizontal Splice Closure 16 Ports IP68 with 24FO Tray	5173N0100002
Horizontal Splice Closure 16 Ports IP68 with 48FO Tray	51A3N0100000
Horizontal Splice Closure 16 Ports IP68 with 144FO Tray	51D3N0100000
Horizontal Splice Closure 16 Ports IP68 with 216FO Tray	51G3N0100000