

Single Mode Fiber Pigtail 9/125um LSZH Jacket


DESCRIPTION

LC pigtail single-mode supply offers a wide variety of connector options, jacket colors, and diameters as well as different flammability ratings.

Single-mode pigtail is yellow, and there are two kinds of wavelength, 1310nm, and 1550nm, with transmission distances of 10km and 40km respectively, which have different numbers of meters.

Fiber optic pigtails are available for pc or APC, single-mode and multimode, even indoor or outdoor.

LC pigtail can be customized with LC, SC, FC, and ST type connectors and with 0.9mm, 2.0mm, and 3.0mm cables. They are usually found in fiber optic management equipment like ODF, fiber terminal boxes, and distribution boxes.

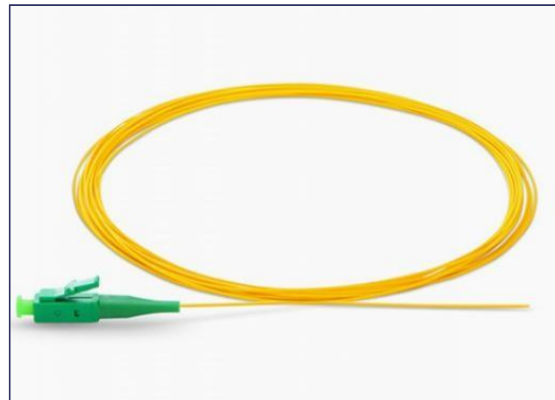

FEATURES

- Ceramic ferrules
- Free different lengths of pigtail samples in stock
- Risk-free money return with quality problem
- Acceptable quality testing
- Exceeds industry standards
- Guaranteed quality and performance
- 100% tested and recorded for insertion loss and return loss

APPLICATIONS

- CATV, LANs, WANs
- Telecommunication networks
- Active device termination
- Data center system networks
- Video and military active device termination

SPECIFICATIONS

Fiber Type	SM (9/125um)		MM (50/125um、62.5/125um)
Polish	UPC	APC	PC
Insertion Loss (typical)	≤0.30dB		≤0.30dB
Return Loss	≥55dB	≥65dB	≥20dB
Repeatability	1000 times typical change value ≤ 0.20dB		
Interchangeability	≤0.20dB		
Cable Diameter	0.9mm		
Jacket Material(optional)	LSZH、OFNP、OFNR、PVC		
Fiber Type(optional)	G652D, G657A, G657B, OM1, OM2, OM3, OM4, OM5		
Operating Temperature	-20 ~ +70 °C		
Storage Temperature	-40 ~ +85 °C		
Color code sequence	Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Purple, Pink, Aqua		

ORDERING INFORMATION

Description	Reference