

Plastic fiber optic distribution frame

1U 24/48F

DESCRIPTION


Patch panel apply to the protective connection of cable and pigtail, the Material is High quality ABS, brackets is cold rolled steel, this panel mainly installed in fiber optic cabinet and rack.

FEATURES

- Max capacity is 24/48cores
- Special sliding design, operation easy and convenient
- Variety of cold-rolled steel adapter plate for choice based on different demands
- Material is ABS plastic, light weight. Black or white optional.

APPLICATIONS

- FTTH, LAN, PON & Optical CATV
- Telecom central offices
- Data center

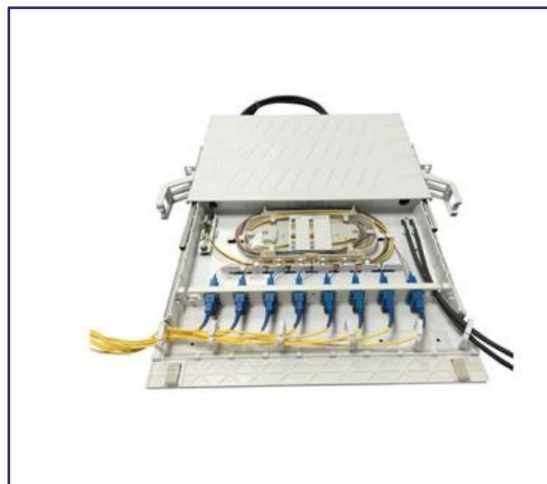

SPECIFICATIONS

Parameter	Value
Adopter	SC simplex, SC duplex
Fiber count	Up to 48F
Body dimension(mm)	W 482mm × H 44mm × D 300mm
Material	ABS
Splice tray	1/2

ORDERING INFORMATION

Description	Reference

Approved by :

Reviewed by: