

SC SM/MM secure lockable Connector

DESCRIPTION


SC Secure Lockable Connector based with a lock system, ideal for networks with higher security levels such as military, government and financial; Five different colors/keys available; Can only be removed with matching color key; Applies to 2.0/3.0mm cable; FOCIS-3/TIA-604-3 and GR326-core compliant; RoHS/REACH and UL94-V0 inflammability grade compliant.

FEATURES

- Five different colors/keys available
- Can only be removed with matching color key
- Applies to 2.0/3.0mm cable
- FOCIS-3/ TIA-604-3/IEC 61754-4 and GR326-core reference
- RoHS/REACH and UL94-V0 inflammability grade compliant
- Compatible with all industry standard SC adapters

APPLICATIONS

- Military network
- Government network
- Financial network

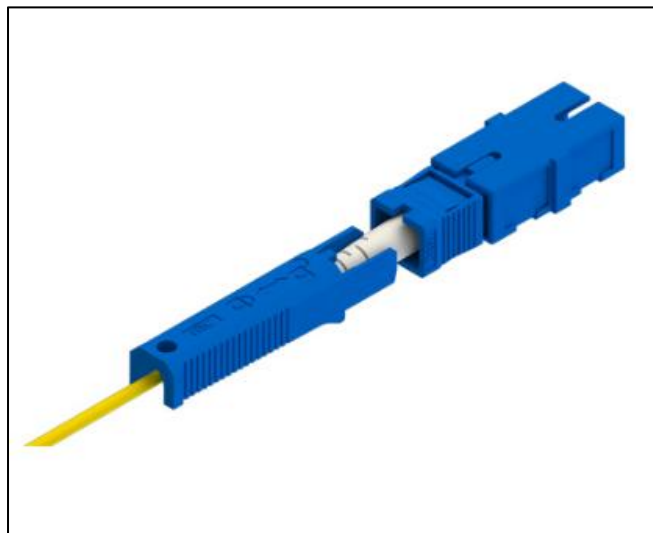

SPECIFICATIONS

Parameter	Value	
	Single mode	Multi mode
Insertion Loss	≤0.3dB	
Return Loss	≥50dB(UPC);≥60dB(APC)	≥30dB
Ceramic ferrule spec (125.5μm concentricity deviations)	Standard:<1μm Premium: <0.5μm Premium plus: <0.3μm	<4μm
Insert-pull test	100 times	
Operation temperature	-40°C~+85°C	
Suitable fiber	UPC/APC(9/125μm)	UPC (50/125μm,62.5/125μm)
Boot type	2.0 mm /3.0 mm /Short Boot/ Long Boot	

ORDERING INFORMATION

Description	Reference
2.0mm SC/PC MM Standard loss, long boot	21B120101000
2.0mm SC/UPC SM Standard loss, long boot	21B210101000