

Trackable Duplex LC Patch Cords

DESCRIPTION


Just a data cable with micro usb on one end and a mobile power supply, plug and play. After power is supplied to either end of the connector, the connectors at both ends will be on at the same time. Find the link quickly. It is recommended to press and hold DLC connector when plugging micro usb. Online plugging does not affect link performance.

FEATURES

- Vertical tensile resistance of jumper $\geq 70N$.
- Materials meet ROHS requirements.
- Product executive standard: IEC 61754-20 / IEC 60332-1 / IEC 61034
- No built-in battery, the whole line are under environmental protection
- Easy plug and play
- Convenient power supply, safe and reliable

APPLICATIONS

→ Telecom system → Cabling system → Data Center
 → LAN/WAN network → FTTH

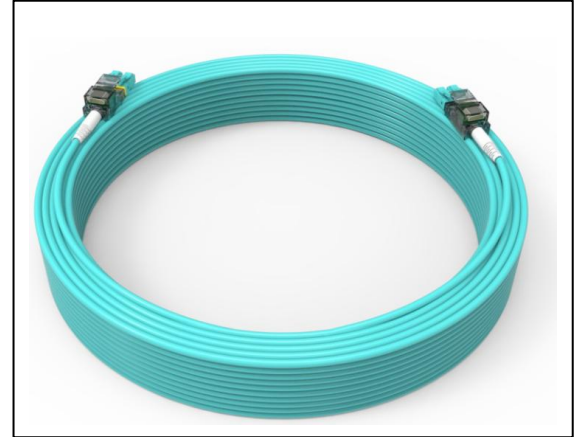

SPECIFICATIONS

Item	Parameters
Fiber Count	2
Fiber Type	OM3
Connector Type	Duplex LC
Strength member	Aramid yarn
Insertion Loss	≤ 0.3 dB
Return Loss	≥ 30 dB
Cable Diameter	3.0 mm
Cable Jacket	LSZH
Vertical tensile resistance	$\geq 70N$
Operation Temp.	$-25^{\circ}C \sim +70^{\circ}C$

ORDERING INFORMATION

Description	Reference